

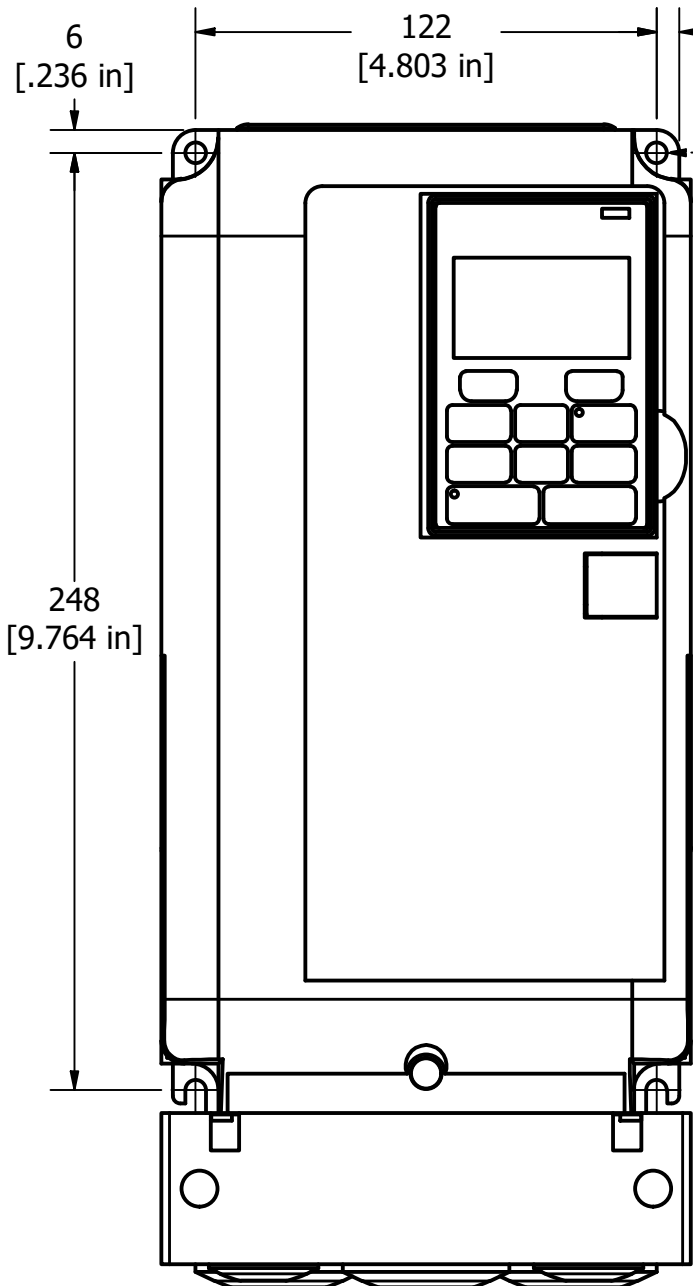
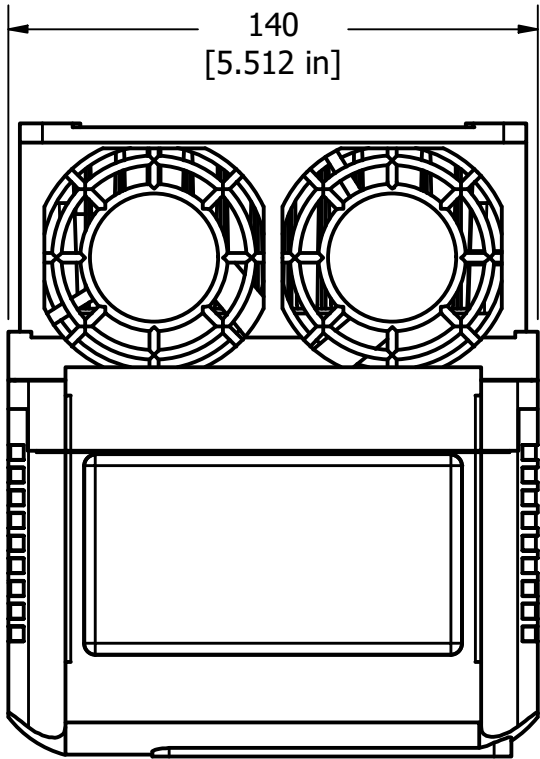



- NOTES:
1. MAXIMUM APPLICABLE MOTOR CAPACITY: 10 HP
 2. INPUT...
 - RATED INPUT CURRENT: 37 A
 3. OUTPUT...
 - RATED OUTPUT CAPACITY: 11.4 kVA
 - RATED OUTPUT CURRENT: 30 A
 - OVERLOAD TOLERANCE: 120% OF RATED OUTPUT CURRENT FOR 60 SECONDS
 - CARRIER FREQUENCY (USER ADJUSTABLE): 2 TO 15 kHz
 - MAXIMUM OUTPUT VOLTAGE: THREE-PHASE 200 TO 240 V (RELATIVE TO INPUT VOLTAGE)
 - MAXIMUM OUTPUT FREQUENCY: 400 Hz
 4. POWER...
 - RATED VOLTAGE / RATED FREQUENCY: THREE-PHASE 200 TO 240 VAC 50/60 Hz 270 TO 340 VDC
 - ALLOWABLE VOLTAGE FLUCTUATION: -15% TO +10%
 - ALLOWABLE FREQUENCY FLUCTUATION: $\pm 5\%$
 - WITH FAN
 - DC LINK CHOKE: EXTERNAL OPTION
 - POWER SUPPLY: 18 kVA

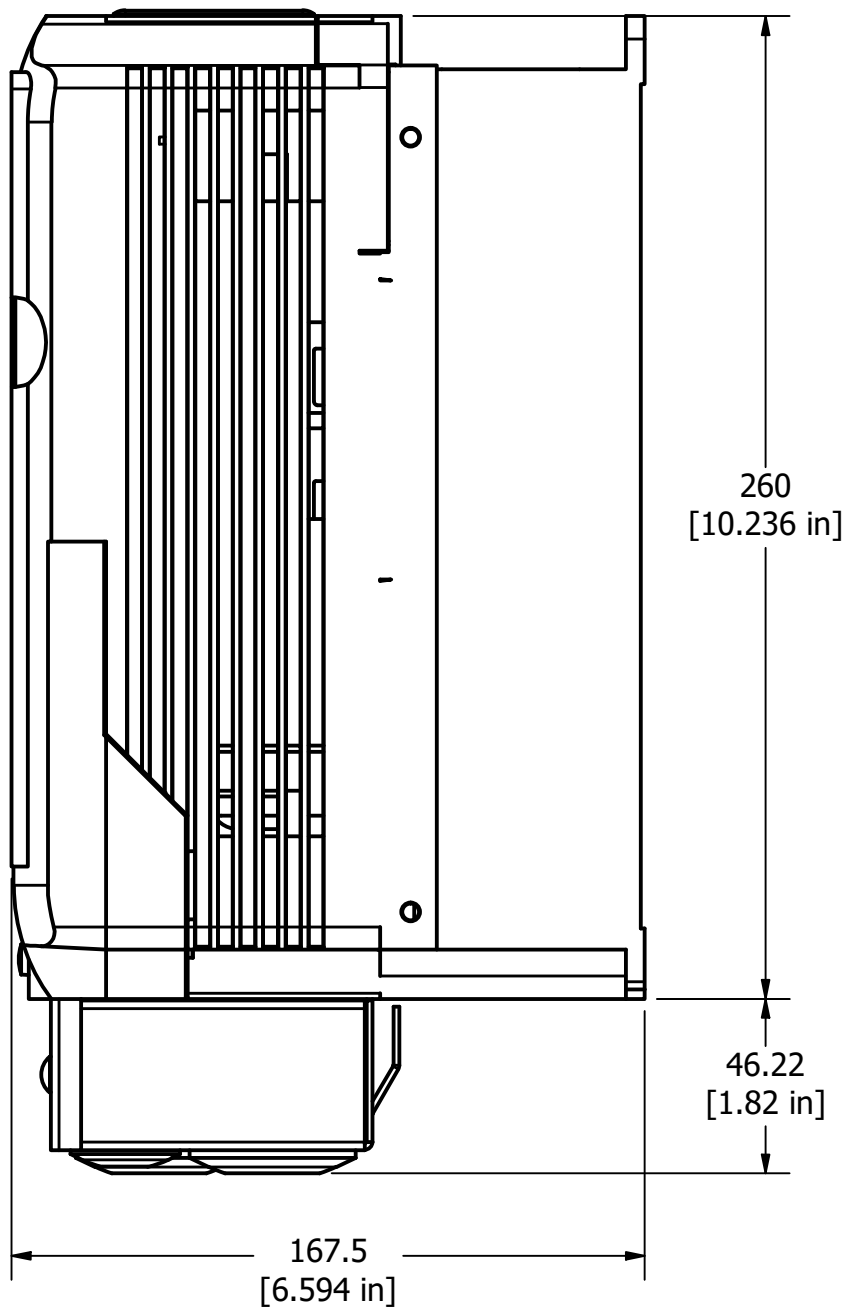


4X MOUNTING HOLES FOR #10 [M5] SCREWS

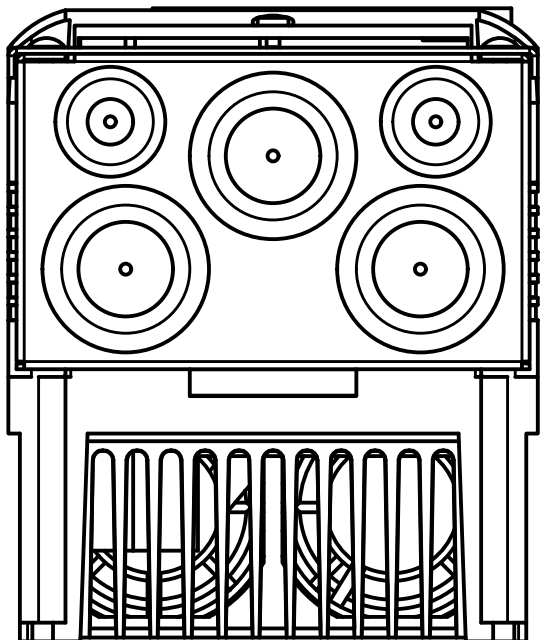

REVISION HISTORY				
REV	RAD	DESCRIPTION	DATE	APPROVED
A	-	INITIAL RELEASE	7/14/2024	

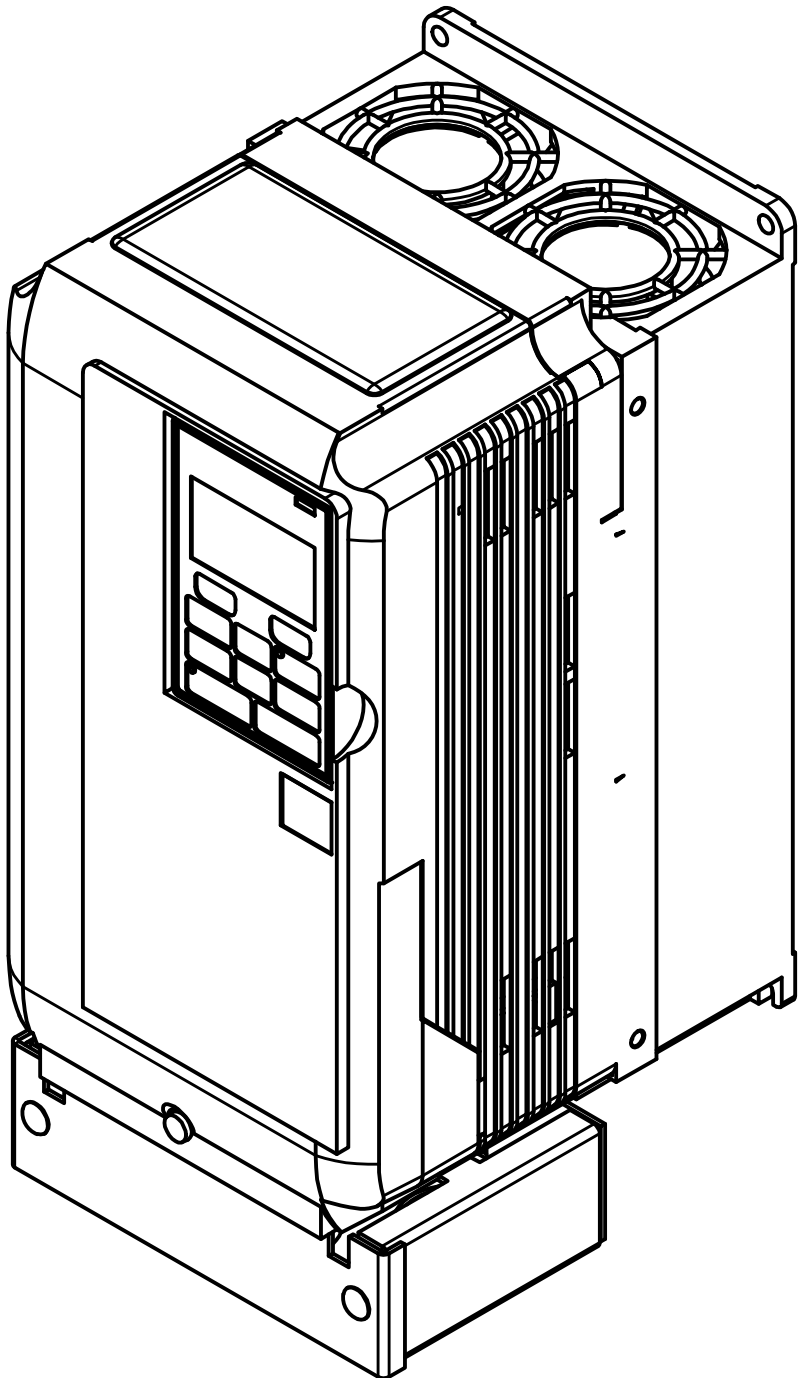

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5-2018		AUTHOR Robert.Szuscicki	DATE 7/14/2024	 1401 W STANFORD AVE ENGLEWOOD, CO 80110 P: (800) 442-7628 F: (303) 781-2683 E: info@garmat.com	
		CHECKED BY Manuel.Vega	DATE 9/19/2024		
THIRD ANGLE PROJECTION		ENG APPROVAL Manuel.Vega	DATE 9/19/2024	DESCRIPTION VARIABLE FREQUENCY DRIVE, 3-PHASE, 240V, 30A, 10 HP, IP20/NEMA TYPE 1 ENCLOSURE	
		MFG APPROVAL	DATE		
				SIZE C	DWG NO 2-VFD-240V-30A-10HP
				SCALE 1 / 2	WEIGHT 4.218 kg
				SHEET	1 of 1