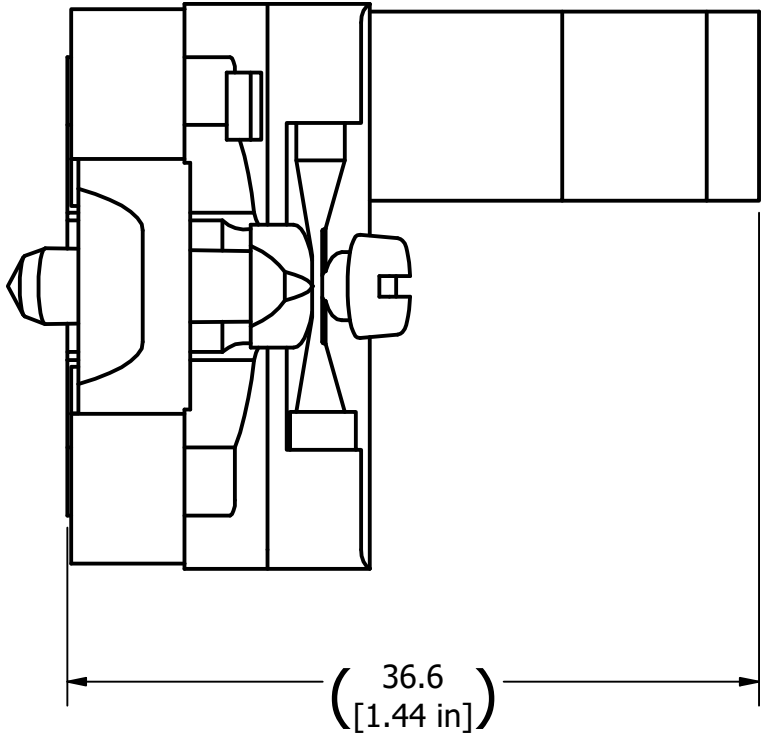
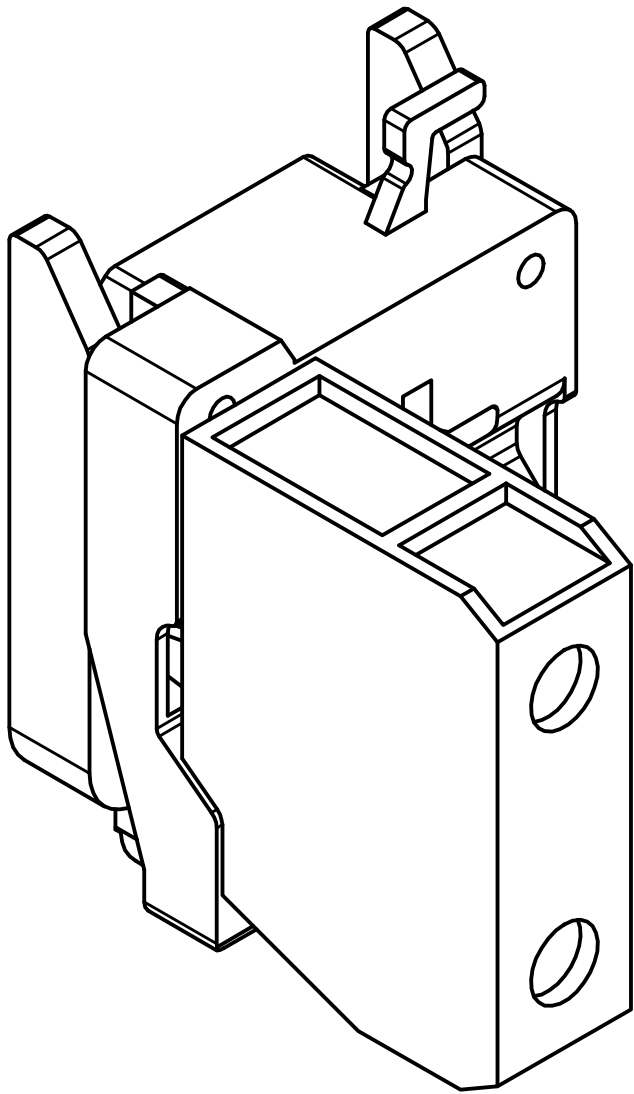
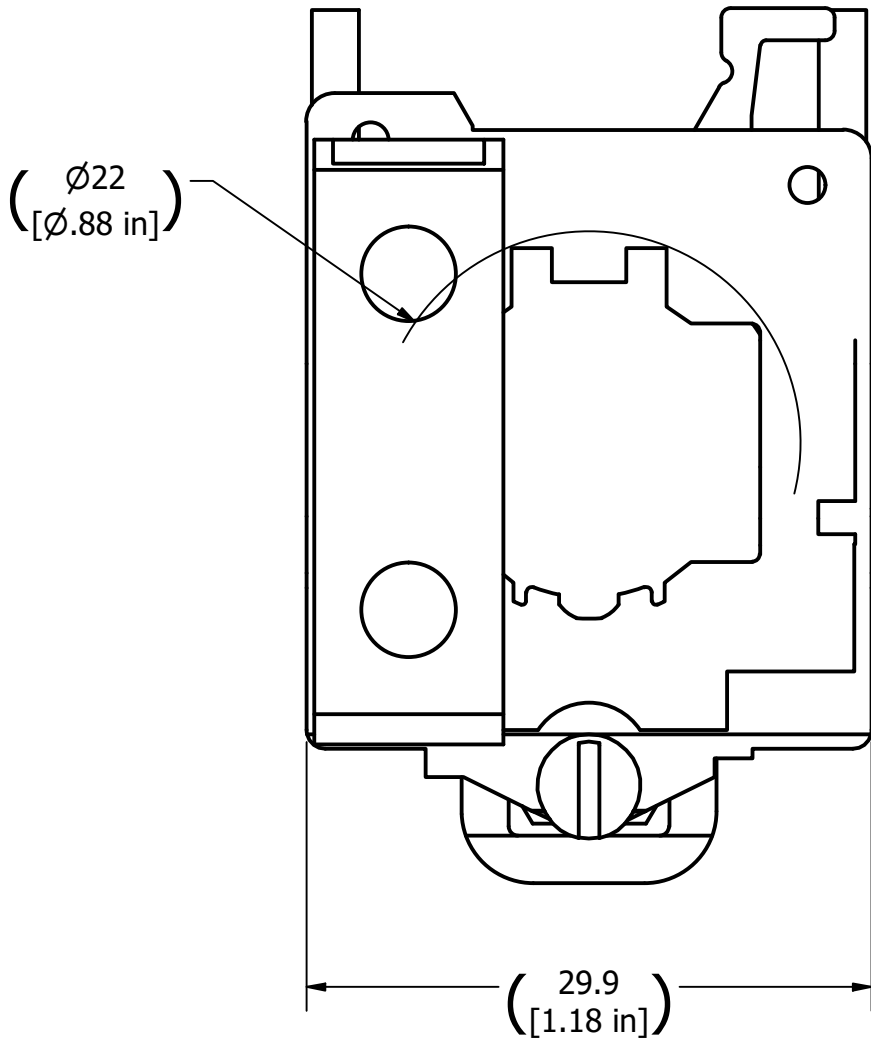
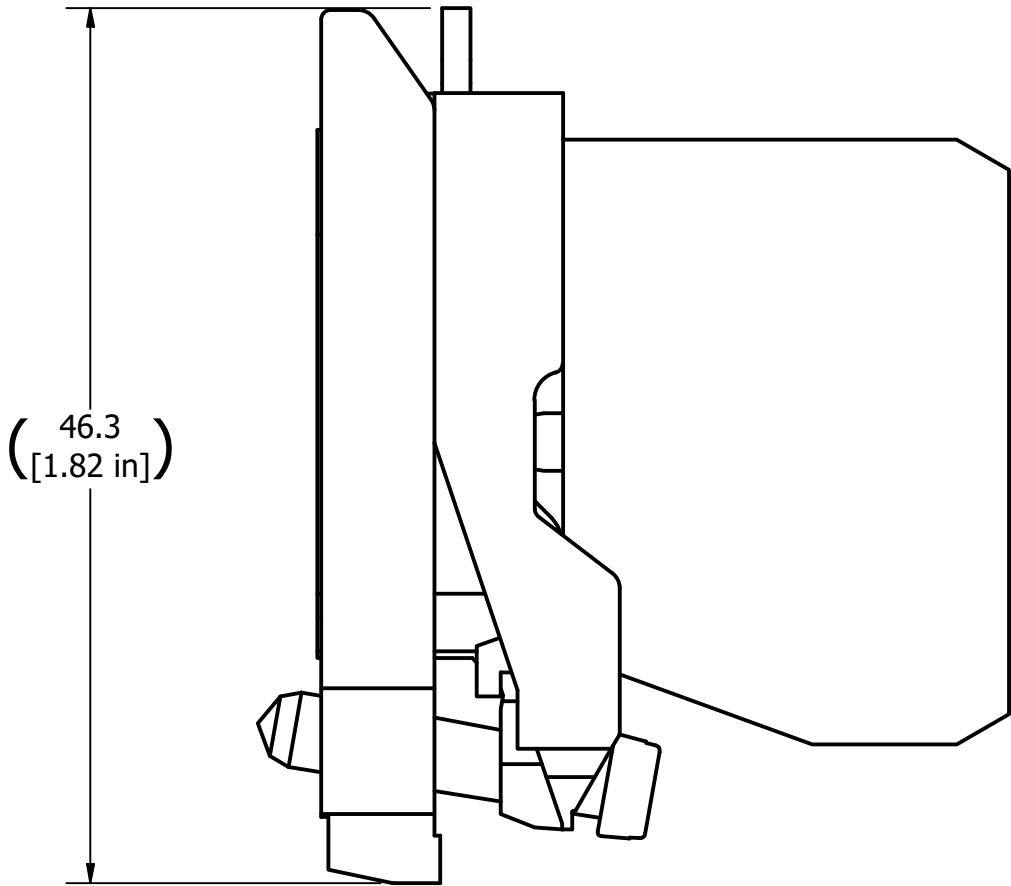




- NOTES:
- DIMENSIONS ENCLOSED IN PARENTHESIS ARE REFERENCE DIMENSIONS, THIS IS AUXILIARY INFORMATION AND DOES NOT GOVERN PRODUCTION OR INSPECTION OPERATIONS.
  - RATED OPERATIONAL CURRENT: 0.1 A (600 VDC), 0.27 A (250 VDC), 0.55 A (125 VDC), 6 A (120 VAC), 3 A (240 VAC), OR 1.2 A (600 VAC)

REVISION HISTORY				
REV	RAD	DESCRIPTION	DATE	APPROVED
A	-	INITIAL RELEASE	6/10/2024	MV



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5-2018		AUTHOR Esteban.Loera	DATE 6/10/2024	 1401 W STANFORD AVE ENGLEWOOD, CO 80110 P: (800) 442-7628 F: (303) 781-2683 E: info@garmat.com	
		CHECKED BY MV	DATE 9/18/2024		
		ENG APPROVAL MV	DATE 9/18/2024	DESCRIPTION  CONTACT BLOCK, 1 NORMALLY OPEN, 6A, WITH BASE	
		MFG APPROVAL	DATE		
THIRD ANGLE PROJECTION				SIZE C	DWG NO 2-CTBLK-1NO-6A-WB
				SCALE 2.5 : 1	WEIGHT 0.053 kg
				SHEET	1 of 1