
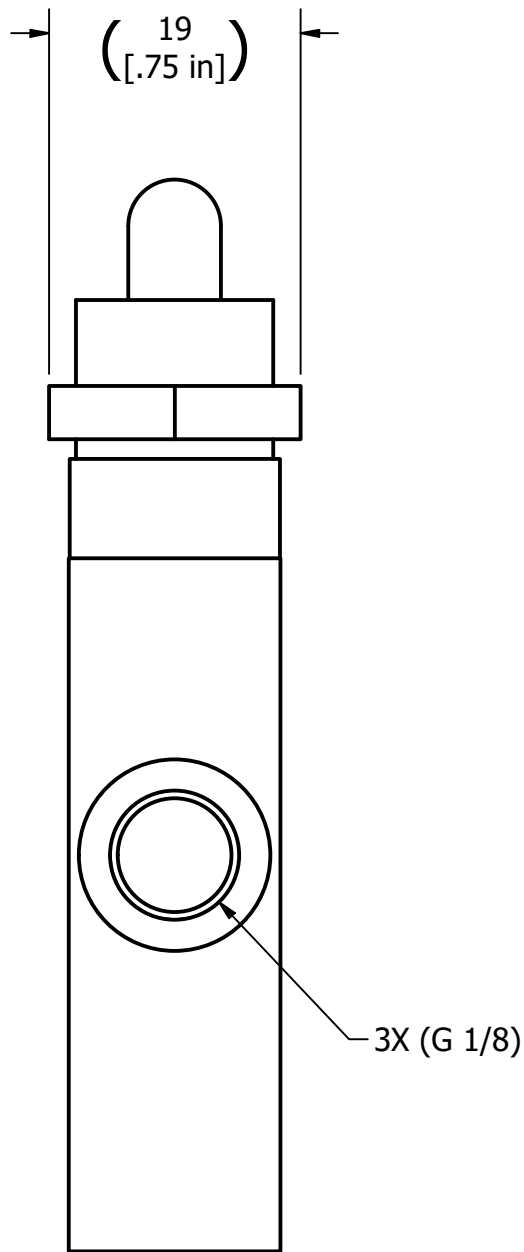
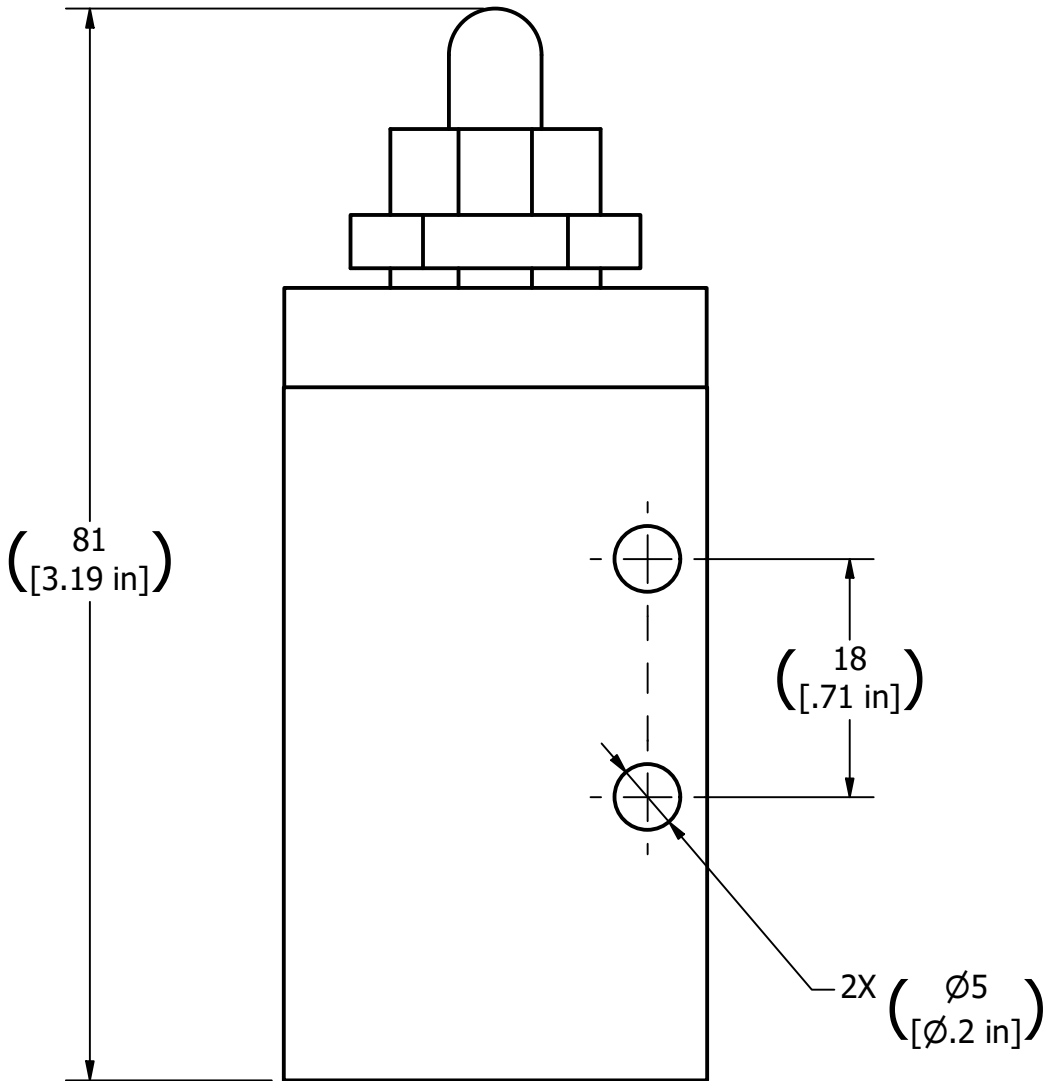
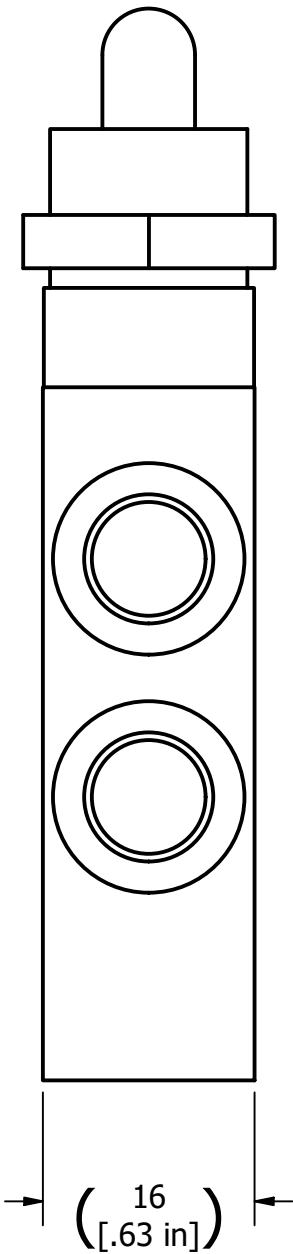
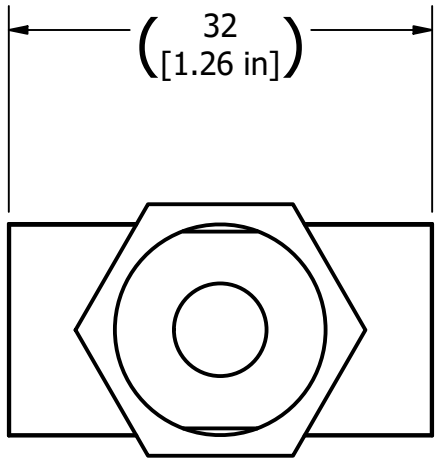
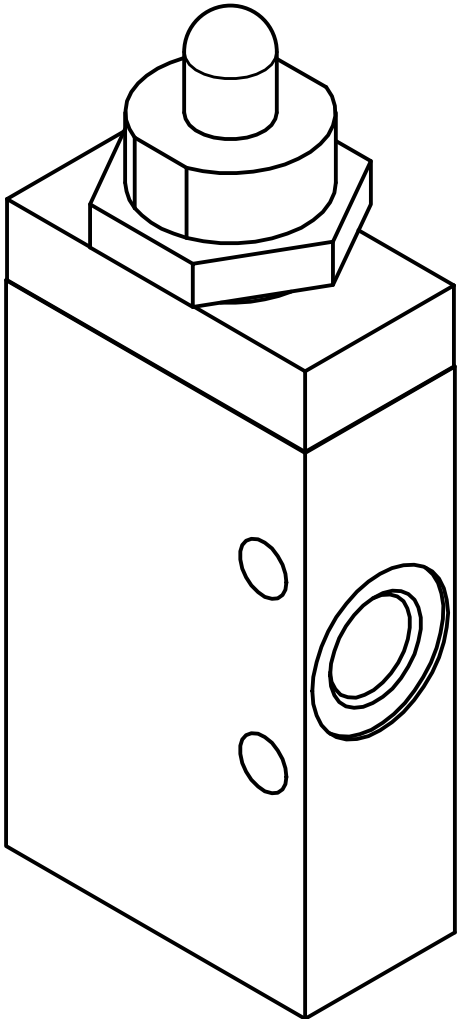


- NOTES:
- DIMENSIONS ENCLOSED IN PARENTHESIS ARE REFERENCE DIMENSIONS, THIS IS AUXILIARY INFORMATION AND DOES NOT GOVERN PRODUCTION OR INSPECTION OPERATIONS.
 - OPERATING PRESSURE: -13.05 TO 145 PSI (-0.9 TO 10 BAR)
 - MEDIUM TEMPERATURE: 32 TO 122°F (0 TO 50°C)
 - AMBIENT TEMPERATURE: 32 TO 140°F (0 TO 60°C)
 - ACTUATING FORCE: 7.19 LBF (32 N)

REVISION HISTORY				
REV	RAD	DESCRIPTION	DATE	APPROVED
A	-	INITIAL RELEASE	6/25/2024	MV



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5-2018		AUTHOR Esteban.Loera	DATE 6/25/2024	 1401 W STANFORD AVE ENGLEWOOD, CO 80110 P: (800) 442-7628 F: (303) 781-2683 E: info@garmat.com	
		CHECKED BY MV	DATE 9/16/2024		
		ENG APPROVAL MV	DATE 9/16/2024		
		MFG APPROVAL	DATE		
THIRD ANGLE PROJECTION				DESCRIPTION VALVE, PLUNGER ACTUATED, 3-WAY/2-POSITION, NC, G1/8"	
				SIZE C	DWG NO 2-VLV-PA-3W2P-G.125
				SCALE 1.75:1	WEIGHT 0.090 kg
				SHEET	1 of 1