
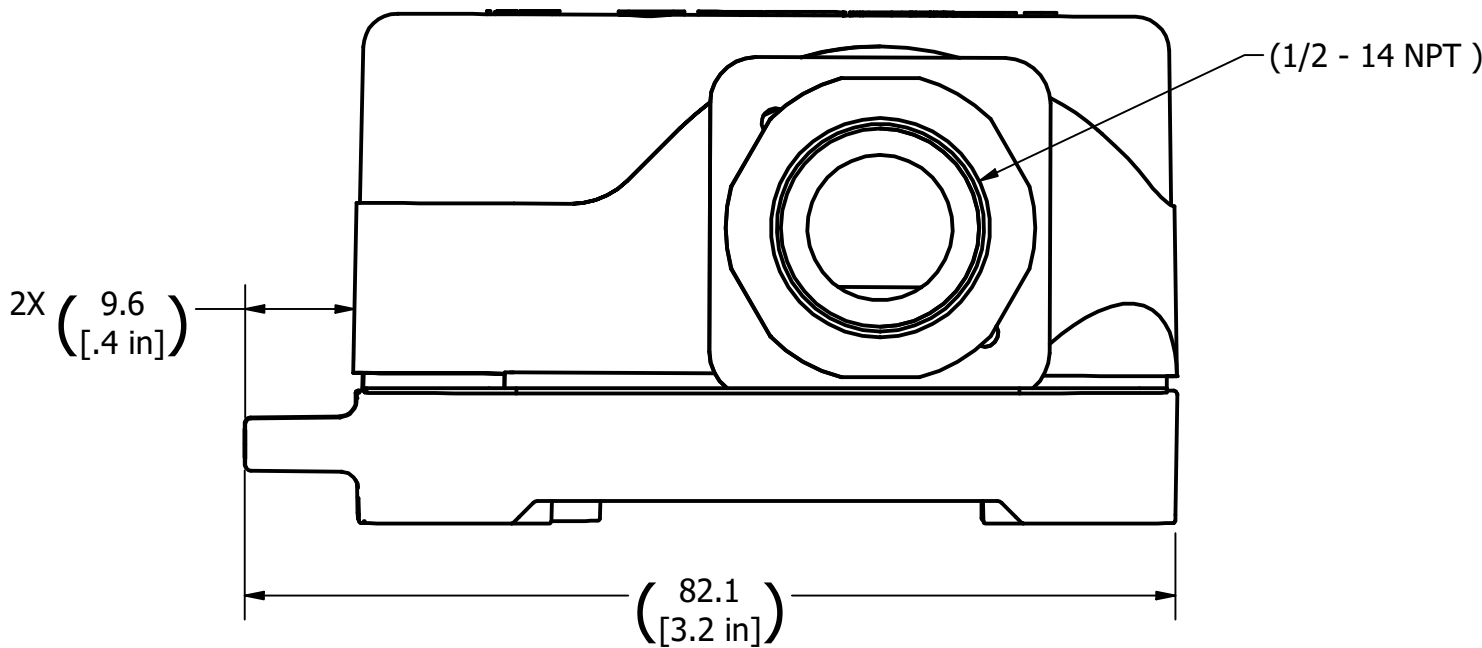
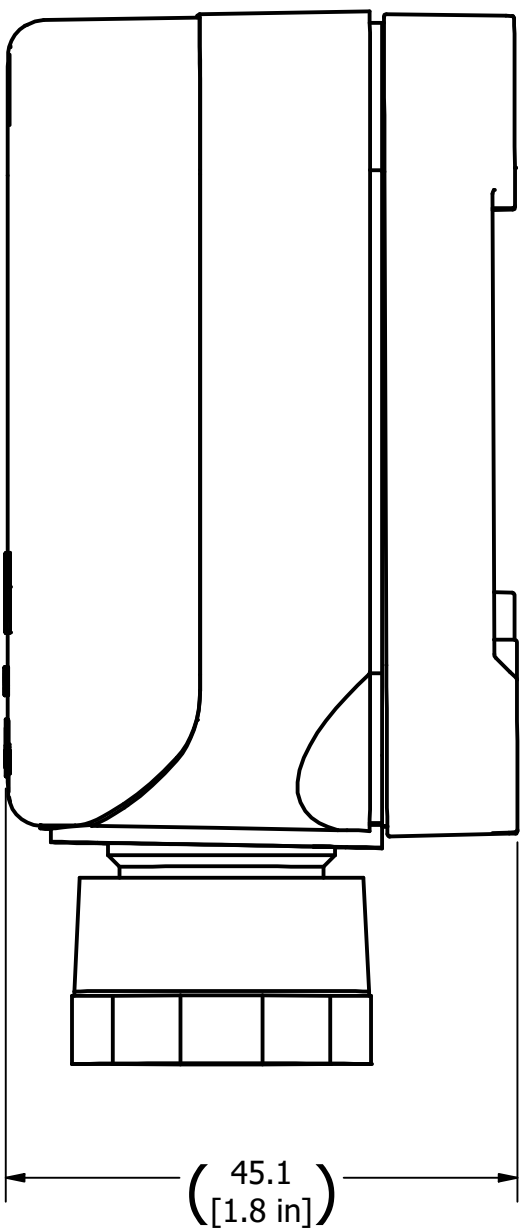
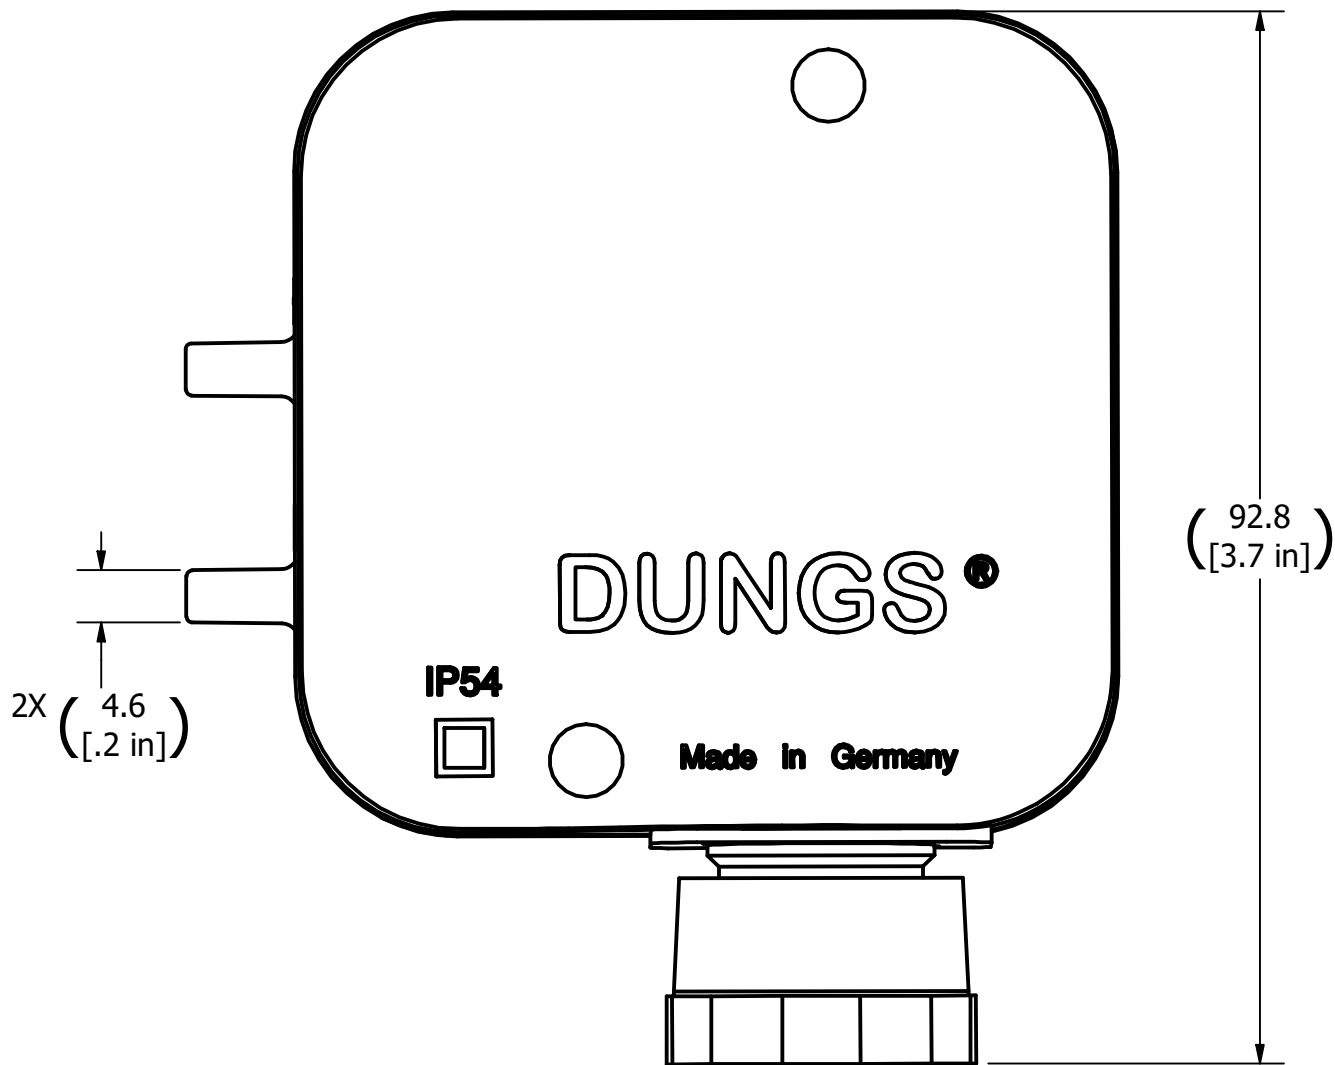


- NOTES:
- DIMENSIONS ENCLOSED IN PARENTHESIS ARE REFERENCE DIMENSIONS, THIS IS AUXILIARY INFORMATION AND DOES NOT GOVERN PRODUCTION OR INSPECTION OPERATIONS.
 - MAX OPERATING PRESSURE: 7 PSI (500 mBAR)
 - MEDIUM TEMPERATURE: -40 TO 140°F (-40 TO 60°C)
 - TUBING CONNECTION (ID): 3.97 [5/32 in]
 - INPUT VOLTAGE: 24 VDC OR 120 VAC
 - CURRENT RATING: 1 A (24 VDC) OR 5 A (120 VAC)

REVISION HISTORY				
REV	RAD	DESCRIPTION	DATE	APPROVED
A	-	INITIAL RELEASE	8/5/2024	MV



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5-2018	AUTHOR	DATE	 1401 W STANFORD AVE ENGLEWOOD, CO 80110 P: (800) 442-7628 F: (303) 781-2683 E: info@garmat.com								
	Esteban.Loera	8/5/2024									
	CHECKED BY	DATE									
	MV	9/16/2024									
THIRD ANGLE PROJECTION	ENG APPROVAL	DATE	DESCRIPTION SWITCH, DIFFERENTIAL PRESSURE, 0.4-4.0" WC, SPDT, 5/32" TUBE ID								
	MV	9/16/2024									
	MFG APPROVAL	DATE				SIZE C					
									DWG NO 2-SWCH-DP-.4_4INWC-SPDT		
			REV A								
			SCALE	3:2	WEIGHT	0.170 kg	SHEET	1 of 1			