
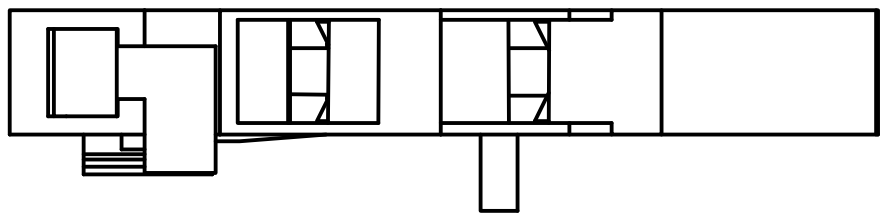
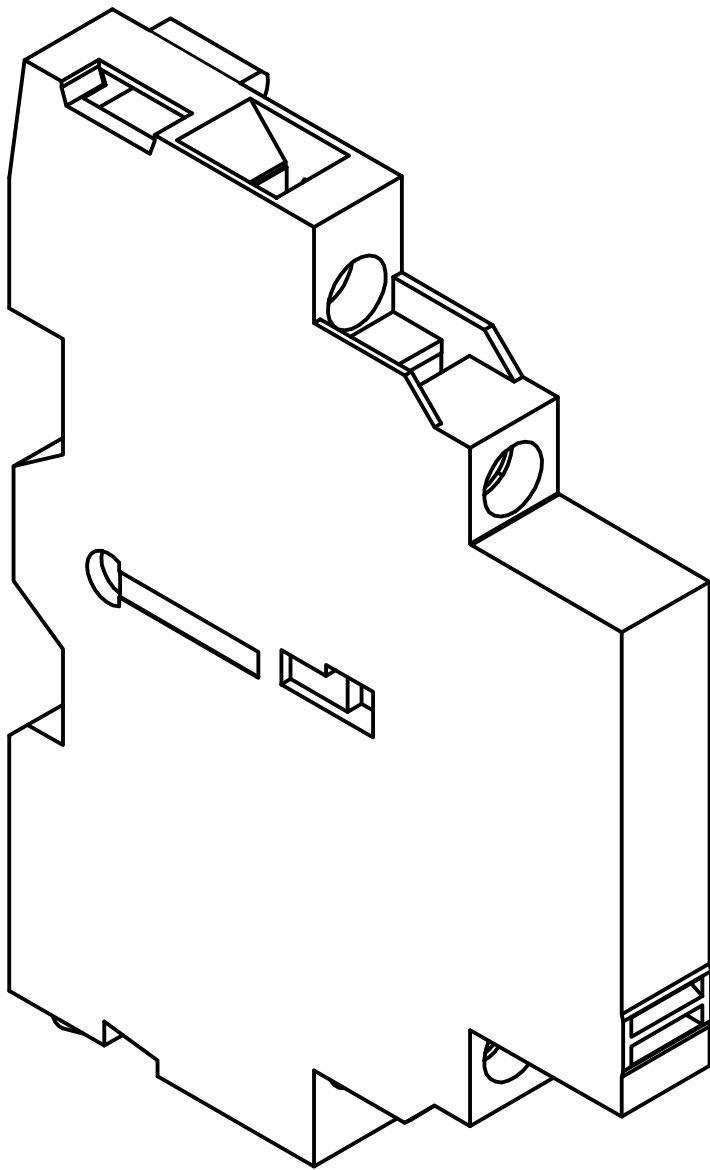
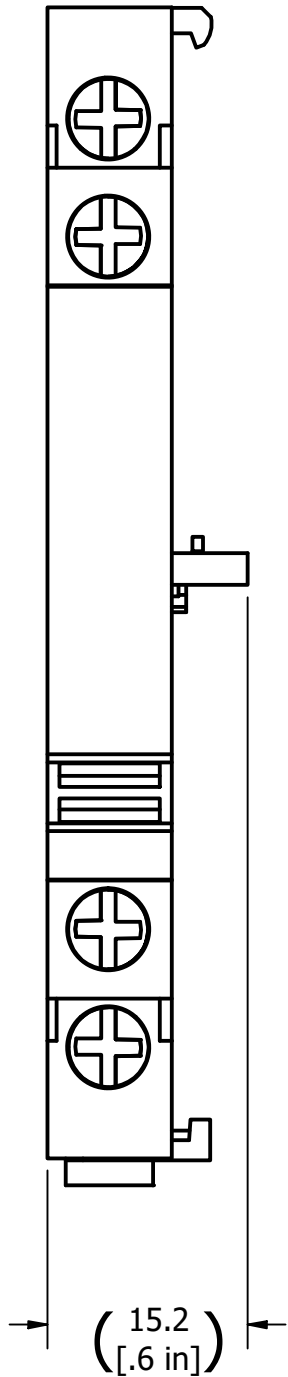
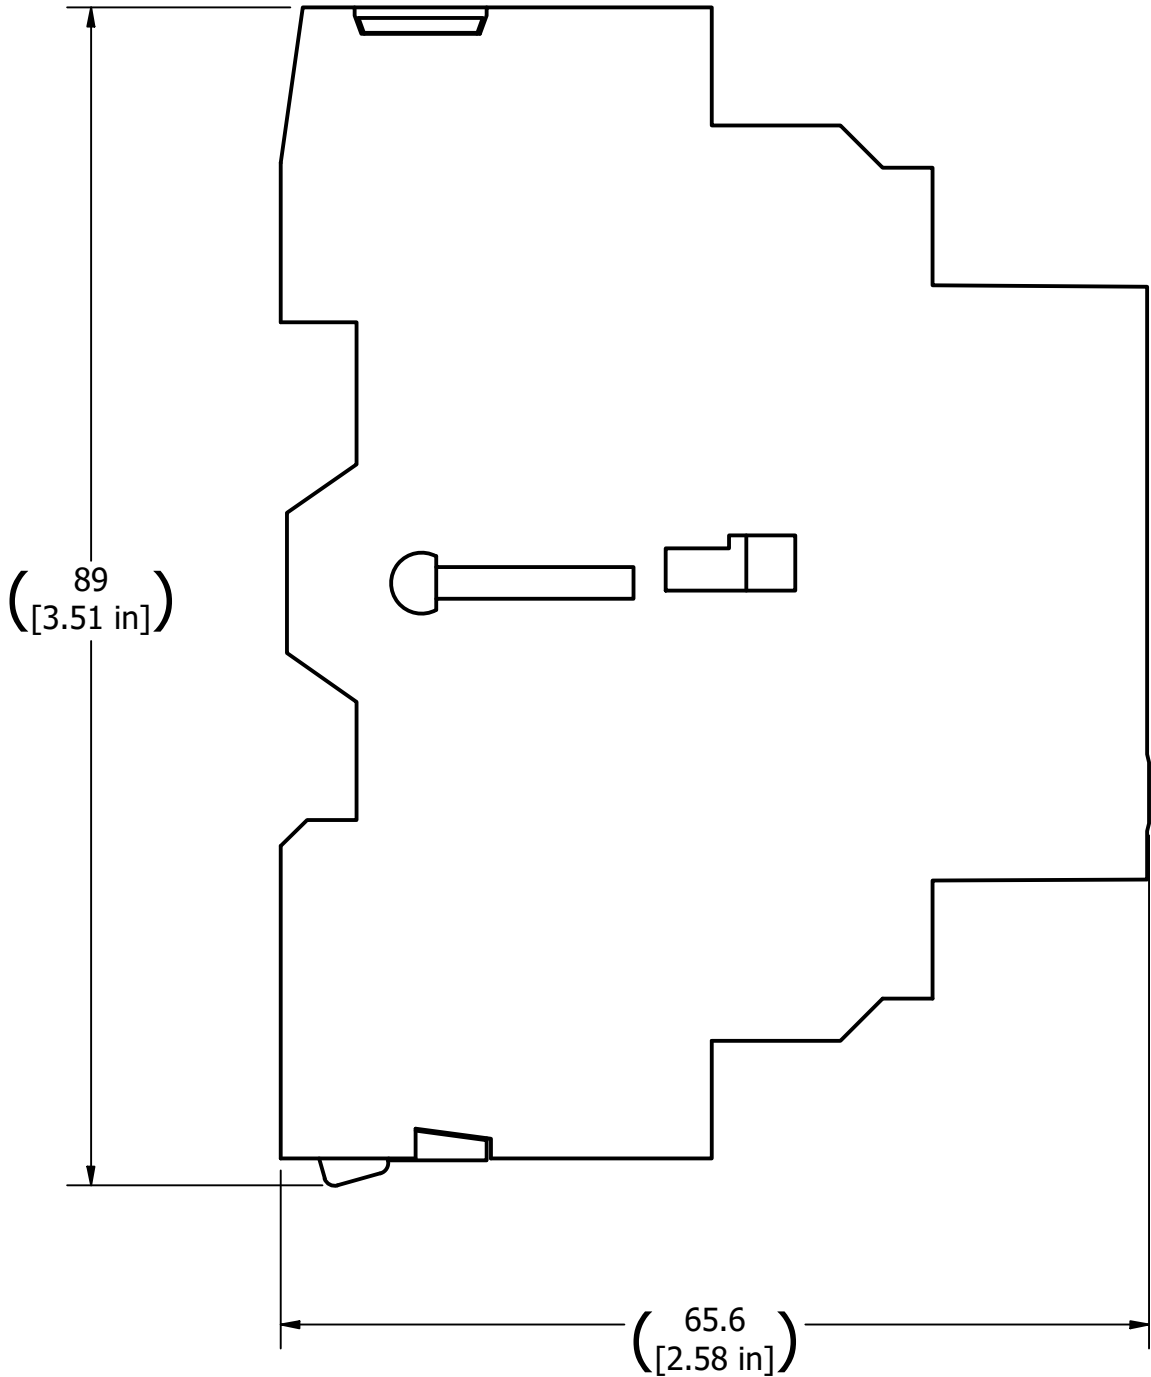


- NOTES:
- DIMENSIONS ENCLOSED IN PARENTHESIS ARE REFERENCE DIMENSIONS, THIS IS AUXILIARY INFORMATION AND DOES NOT GOVERN PRODUCTION OR INSPECTION OPERATIONS.
 - RATED OPERATIONAL VOLTAGE: 48-690 VAC OR 24-240 VDC
 - CURRENT RATING: 6 A

REVISION HISTORY				
REV	RAD	DESCRIPTION	DATE	APPROVED
A	-	INITIAL RELEASE	6/11/2024	MV



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5-2018		AUTHOR Esteban.Loera	DATE 6/11/2024	 1401 W STANFORD AVE ENGLEWOOD, CO 80110 P: (800) 442-7628 F: (303) 781-2683 E: info@garmat.com	
		CHECKED BY MV	DATE 9/18/2024		
		ENG APPROVAL MV	DATE 9/18/2024		
		MFG APPROVAL	DATE		
THIRD ANGLE PROJECTION				DESCRIPTION CONTACT BLOCK, AUXILIARY, MANUAL STARTER, 1 NORMALLY OPEN/1 NORMALLY CLOSED, 6A	
					
SIZE C	DWG NO 2-CTBLK-1NO1NC-6A	REV A		SCALE 1.75 : 1	WEIGHT 0.050 kg
		SHEET 1 of 1			