

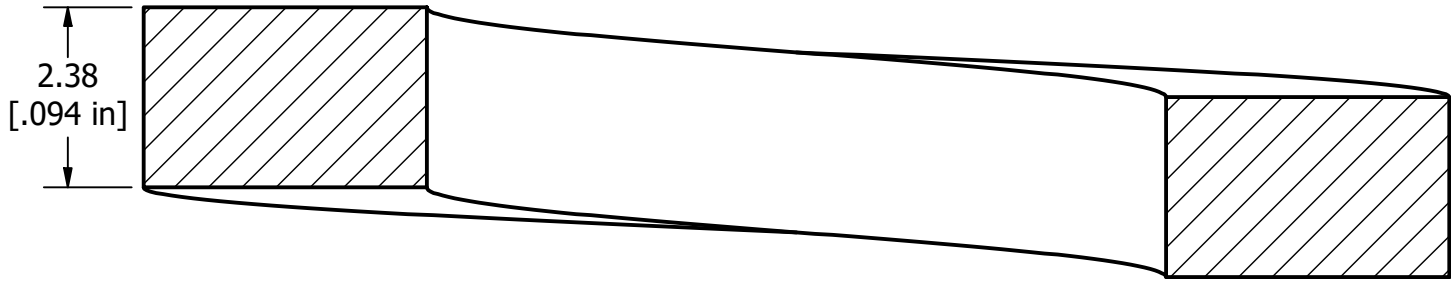



- NOTES:
- DIMENSIONS: ASME B18.21.1, REGULAR HELICAL SPRING-LOCK WASHER
 - MATERIAL: CARBON STEEL MEETING AISI 1055-1065, 0.5-1.2% Mn ALLOWED
 - HARDNESS: 38-46 HRC
 - FINISH: MECHANICAL ZINC PER ASTM B695, CLASS 5, TYPE I (CLEAR). FINISH SHALL BE IN COMPLIANCE WITH CURRENT RoHS EUROPEAN UNION DIRECTIVE.

REVISION HISTORY				
REV	RAD	DESCRIPTION	DATE	APPROVED
A	-	INITIAL RELEASE	8/23/2024	

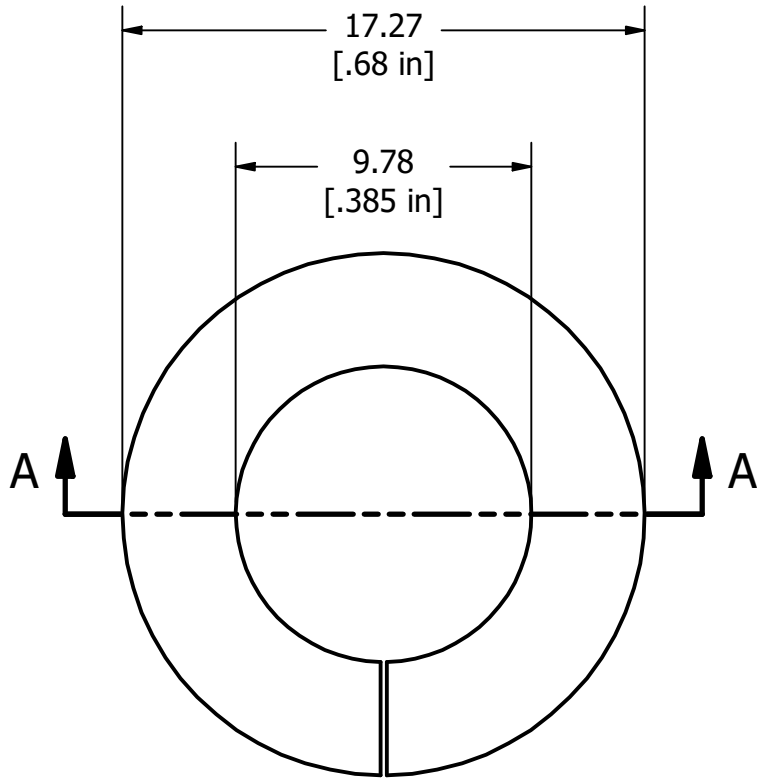

SECTION A-A
SCALE 10 : 1

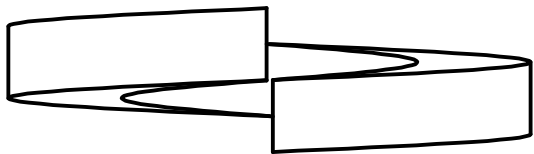

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5-2018	AUTHOR	DATE	 1401 W STANFORD AVE ENGLEWOOD, CO 80110 P: (800) 442-7628 F: (303) 781-2683 E: info@garmat.com				
	Robert.Szuscicki	8/23/2024					
	CHECKED BY	DATE					
	Manuel.Vega	9/19/2024					
THIRD ANGLE PROJECTION	ENG APPROVAL	DATE	DESCRIPTION WASHER, HELICAL SPRING LOCK, 3/8" BOLT SIZE, 0.385 ID X 0.680 OD X 0.094, CARBON STEEL, MECHANICAL ZINC				
	Manuel.Vega	9/19/2024					
	MFG APPROVAL	DATE					
			SIZE	DWG NO	REV		
			C	2-WSHR-HSL-.375X0.680-ST-ZN	A		
			SCALE	4 : 1	WEIGHT	0.003 kg	SHEET